

# VIKING

# TECHNICAL Practice

TELECOM SOLUTIONS FOR THE 21ST CENTURY

**K-1500P-D**  
**K-1500P-W**  
Wall and Desk Phones  
with Ringer and Network  
February 14, 2005

## Use Dial-less Phones for Ringdown, Courtesy or Emergency Applications



The **K-1500P-D** (desk) and **K-1500P-W** (wall) phones features a standard wall or desk configuration with a built-in ringer. Both are available in two colors: red or ash.

The **K-1500P-D** or **K-1500P-W** can be used on an analog PABX station port or standard C.O. line to receive calls. It can also be used with a dedicated ringdown circuit, such as Viking's **DLE-200B**, to provide cost effective point-to-point communications.

If an automatic Hot-Line dialer is required, the **K-1900W-2** (wall) and the **K-1900D-2** (desk) Hot-Line phones are available. For similar vandal resistant applications, the **K-1500-7**, **K-1700-3**, **K1900-7**, and **K-1900-8** are available!

### Features


- Built in volume adjustable ringer
- No dial pad
- Hearing aid compatible amplified handset with volume control
- Available in two colors: red or ash
- Optional **VE-9x12** or **VE-9x20** weatherproof box

**?** Need More Information the **VE-9x12** or **VE-9x20**?  
Call (715) 386-4345 and select 413.

### Installation

**K-1500P-D**: Insert the RJ11 plug into a standard RJ11 jack.

**K-1500P-W**: Line up the pins of the RJ11W jack with the slots on the back of the phone, insert and press down.

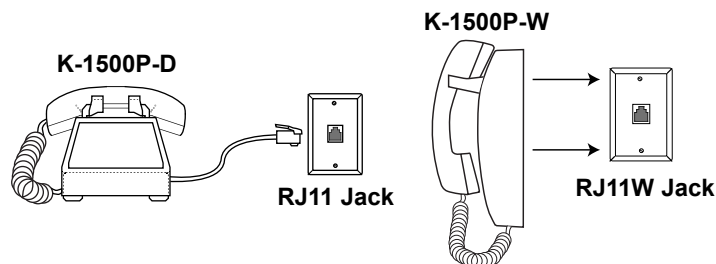

### Applications

- Ringdown phones
- Pool phones
- Catalog sales
- Kiosks in malls
- Courtesy and customer service phones
- Automated tellers
- Security and emergency phones
- Point to point communication when used with the **DLE-200B** Line Simulator

**?** Need More Information the **DLE-200B**?  
Call (715) 386-4345 and select 605.

Phone...715.386.8861

### Specifications

**Power**: Telephone line powered  
**Dimensions**: **K-1500P-W** - 102mm x 121mm x 229mm (4.0" x 4.75" x 9.0"), **K-1500P-D** - 230mm x 210mm x 120mm (9.0" x 8.25" x 4.75")  
**Weight**: 1.36 Kg (3 lbs)  
**Environmental**: 0°C to 32°C (32°F to 90°F) with 5% to 95% non-condensing humidity  
**Connections**: **K-1500P-D** - (1) RJ11 plug, **K-1500P-W** - (1) RJ11W plug

Product Support Line...715.386.8666

Fax Back Line...715.386.4345

Due to the dynamic nature of the product design, the information contained in this document is subject to change without notice. Viking Electronics, and its affiliates and/or subsidiaries assume no responsibility for errors and omissions contained in this information. Revisions of this document or new editions of it may be issued to incorporate such changes.