

product spotlight

LAKE EFFECT ENCLOSURE



Shown with optional accessories and custom color.



According to The Weather Channel, “Lake effect snows occur when a mass of sufficiently cold air moves over a body of warmer water, creating an unstable temperature profile in the atmosphere.” This unstable temperature profile maximizes the effect of the difference in temperature between the cold air and the warm water.

While there is no water or moisture in the data center, this localized meteorological phenomenon in which air flow helps to maximize the concentrated effect of accelerated temperature differences is the basis for Great Lakes Case & Cabinet Lake Effect™ Thermal Enclosure.

Great Lakes Lake Effect™ (LE) Enclosure provides an even flow of low temperature air to the front intake face of the servers and electrical equipment mounted inside the cabinet. The intake fans accelerate the air at its lowest (and traditionally its coldest) point in the data center and direct it within a pressurized plenum chamber to the equipment and their internal fans in order to more efficiently cool the equipment.

Features:


- Lake Effect™ base unit with two pairs of powder coated 19" universal M6 rails and M6 hardware shipping pallet, and two sets of power strip brackets
- Plexi contour door with lower bottom mesh & locking easy latch handle (front)
- Mesh contour door with locking easy latch handle (rear)
- Pair of solid lift-off side panels
- Solid top panel
- Vertical cable management tray (2)
- Lake Effect™ fan box kit **Patented**
- Plenum kit **Patented**

Part No.


Description

GL840LE-3048 84"H x 30"W x 48"D, 44 RMU, 2000 lb. weight capacity

Temperature (degree)



Cabinet dimensions
84"H X 30"W X 48"D



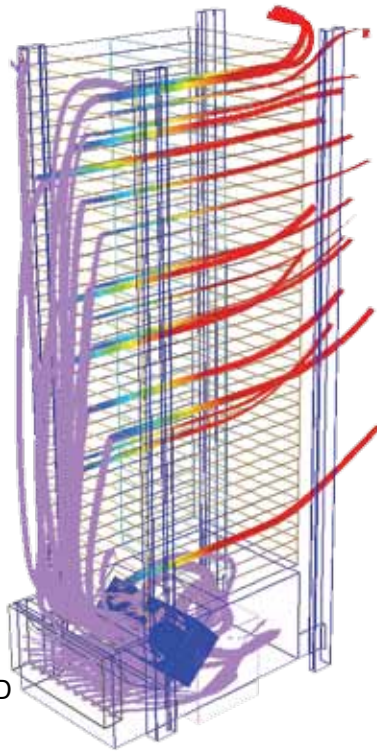


The Lake Effect™ Thermal Enclosure utilizes the proprietary concept of accelerated ambient cooling to provide an even flow of low temperature air to the front intake face of the servers inside. This air is used by the computer's internal fans to cool the equipment. The number of servers that can be placed in an enclosed cabinet is directly related to the amount of air available to cool the equipment. The temperature available at the base on the fan box is limited to the ambient temperature associated with CRAC output or base room temperature.

3D Computational Thermal Analysis was independently tested and verified by Flomerics Using Flotherm Software. Computer models were coupled with powerful fluid dynamic software that predicts airflow and heat transfer in and around electronic equipment. Model includes thirty-six 1RMU servers dissipating 10,000 watts total, 10KW equipment load, even temperature across equipment intakes, intake ambient air: 65°F, 1224 CFM @ 1/8" in H₂O static pressure.

44 RMU

19" EIA 310-D Compliant

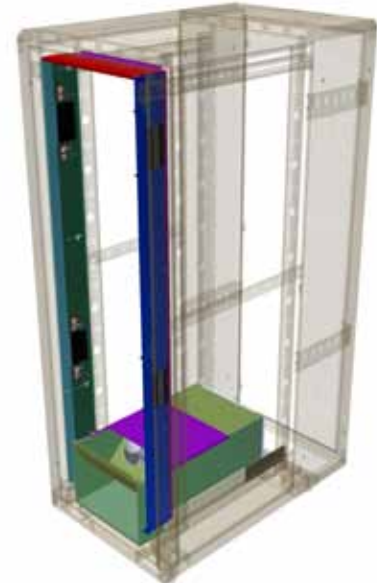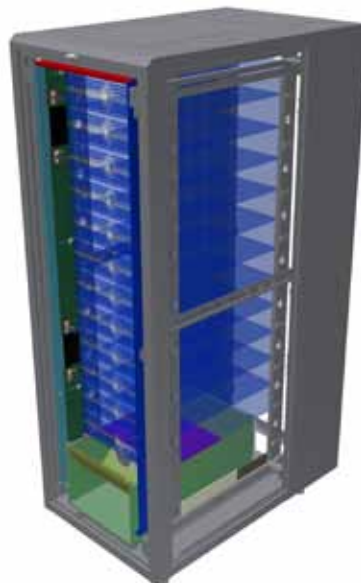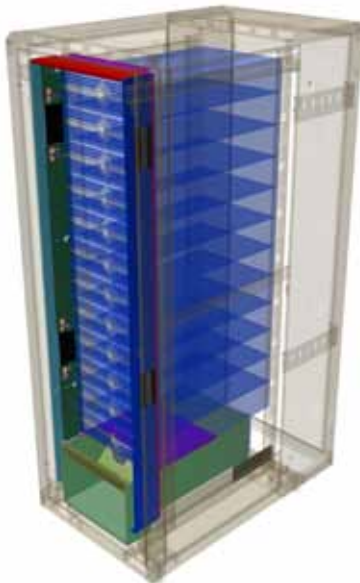

Lake Effect™ is a trademark of Great Lakes Case & Cabinet

CORPORATE HEADQUARTERS

P.O. Box 551
Edinboro, PA 16412
1.866.TRY.GLCC
(1.866.879.4522)
Phone: 814.734.7303
Fax: 814.734.3907
glcc@greatcabinets.com

GREAT LAKES MANUFACTURING, INC.

1521 Enterprise Road
Corry, PA 16407
Phone: 814.734.2436
Fax: 814.665.7025
werackyourworld.com
glm@greatmanufacturing.net

WESTERN DISTRIBUTION

4750 Joule Street
Reno, NV 89502
Phone: 775.829.9913
Fax: 775.829.9926
glcc@greatcabinets.com

GREAT LAKES INTERNATIONAL LTD.

Aerbridge House, Unit 14
Dunshaughlin Business Park
Dunshaughlin Co. Meath
Ireland
Phone: 011 353 1 825 8777
Fax: 011 353 1 825 8778

GREAT LAKES HUNGARY KFT

Zsurló utca 13
8000 Székesfehérvár
Hungary
Phone: 011 36 22 880 420
Fax: 011 36 22 880 429