



Quam

GENERAL DESCRIPTION

The **MA/E6/S2/T8** is a 690 CID sound masking loudspeaker assembly consisting of an 8C10PAX - 8" O.D. dual cone loudspeaker with a 10 oz. magnet, TBL70 - 4W-70V rotary select transformer, and a bi-metal composite 'QuietSteel' enclosure. 4' suspension chain is supplied.

INTENDED USE - Indoor Environment

Installation	Suspended by supplied chain mounting hardware between the structural deck and suspended ceiling deck in the following orientations: upwards or downwards.
Program Material	Equalized Random Noise
Secondary Use	Signal Tones or Voice

AUDIO SPECIFICATIONS

Average Sensitivity	95 dB-SPL 1W/1M
Loudspeaker Power Rating	20W RMS, EIA 426A Standard
Calculated Output	101 dB SPL, 4W/ 1M
Magnet Type, Weight	BeFe Ceramic, 10 oz
Frequency Response	60 Hz - 17 kHz EIA 426A Standard
Nominal Coverage Angle	90° Included Angle, -6 dB / 2 kHz, Half space
Audio Connection	Pre-cut 7" color coded leads
Mechanical Connection	Light steel chain, 4'-0" long, supplied



SYSTEM COMPONENTS

Loudspeaker	8C10PAX
Transformer	70V 4W-5 tap Color code select (4W, 2W, 1W, 0.5W, 0.25W)

MA/E6/S2/T8

SOUND MASKING

690 CID "Quiet Steel" Assembly, 4W-70V Rotary Select Transformer, CITY OF CHICAGO-APPROVED

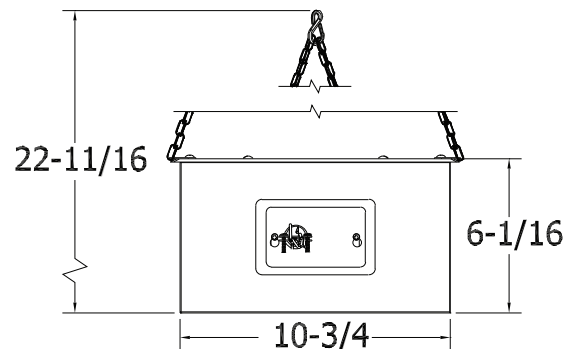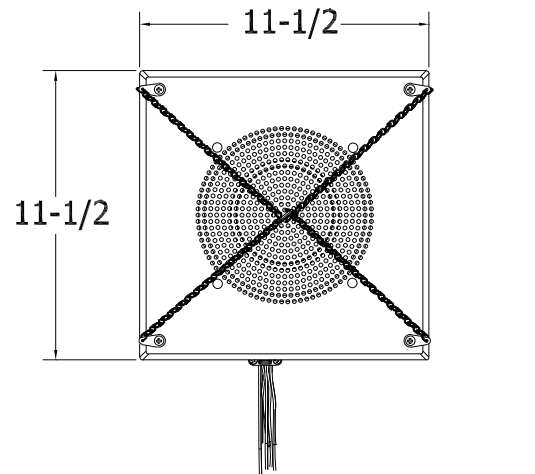

Recommended construction sequences, installation instructions, and A&E Specifications are available in various formats in the Specs and Diagrams section at: www.QuamSpeakers.com

©2017 Quam-Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice.



QUAM-NICHOLS COMPANY, INC.
234 East Marquette Road. Chicago, IL. 60637
t: 1-800-NEED-NOW (800-633-3669)
f: 1-888-NEED-NOW (888-633-3669)
e: NeedNow@QNC.com
www.QuamSpeakers.com